

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 November 2005 (10.11.2005)

PCT

(10) International Publication Number  
**WO 2005/106212 A1**

(51) International Patent Classification<sup>7</sup>: **F01D 17/16**

(21) International Application Number:  
PCT/EP2004/004675

(22) International Filing Date: 3 May 2004 (03.05.2004)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **HONEYWELL INTERNATIONAL INC.** [US/US]; 101 Columbia Road, Morristown, New Jersey 07962 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **PETITJEAN, Dominique** [FR/FR]; 11, route du Bourbet, F-88120 Julienrupt (FR). **ARNOLD, Philippe** [FR/FR]; 56, Route de Damas, F-88270 Hennecourt (FR). **ROGALA, David** [FR/FR]; 106 bis, rue de Lorraine, F-88150 Thaon-Les-Vosges (FR). **MASSON, Patrick** [FR/FR]; 4, rue Berton, F-88450 Gugney-Aux-Aulx (FR).

(74) Agents: **CHIVAROV, Georgi** et al.; TBK-Patent, Bavaring 4-6, 80336 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CENTER HOUSING OF A TURBINE FOR A TURBOCHARGER AND METHOD OF MANUFACTURING THE SAME

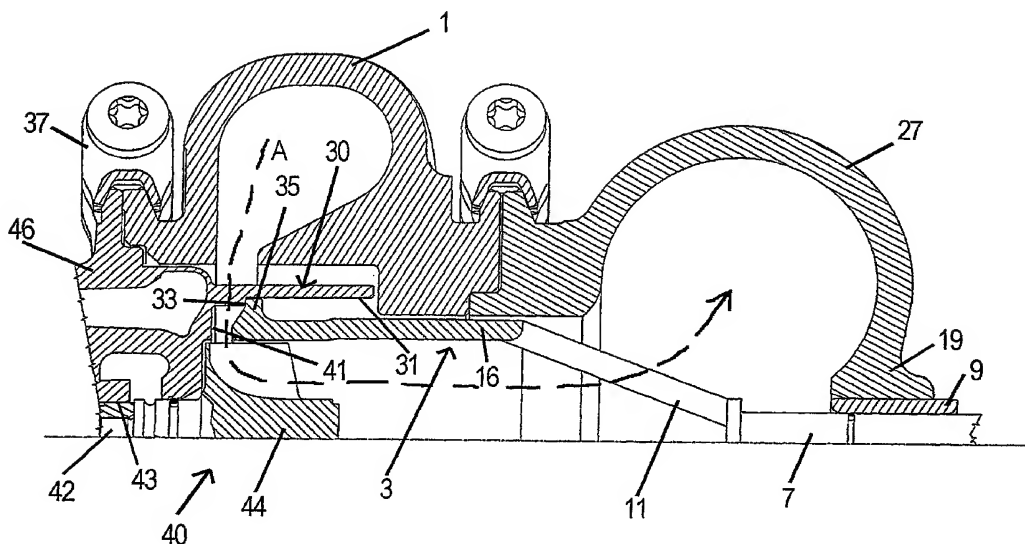

(57) Abstract: A turbine of a turbocharger comprises a floating insert which defines a nozzle for passing a fluid and which is supported axially slidably with respect to a housing by a sliding support means. Said floating insert is axially supported by said guiding means formed by a portion of a center housing.

WO 2005/106212 A1

CENTER HOUSING OF A TURBINE FOR A TURBOCHARGER AND  
METHOD OF MANUFACTURING THE SAME

**Description**

The present invention relates to a center housing of a turbine for a turbocharger and, in particular, to a center housing of a turbine for a turbocharger having an adjustable throat.

Furthermore, the invention relates to a turbocharger and a turbine provided with such a center housing and a method of manufacturing the center housing.

In a conventional turbocharger for use in association with internal combustion engines, a turbocharger having an adjustable nozzle or throat is known from the state of the art. Such a conventional turbocharger comprises an exhaust gas driven turbine which, in turn, drives an inlet air compressor so as to compress inlet air to be supplied to a combustion chamber of the internal combustion engine.

Since the requirements with respect to emissions and fuel consumption have increased in the past, the need for a turbocharger with an improved efficiency has been established. Due to the above requirements, adjustable turbochargers for increasing the operation range based on the operation conditions of the associated internal combustion engine are needed.

According to the state of the art, a turbine for a turbocharger comprises a floating insert which is slidably mounted with respect to a housing portion. The floating insert forms an annular nozzle or passage for passing the fluid towards a turbine wheel. The annular passage is adjustable by axially moving the floating insert.

It is the object of the present invention to provide a center housing of a turbine for a turbocharger having an adjustable throat providing an improved reliability and efficiency at decreased manufacturing costs. Furthermore, it is the object to provide a turbocharger and a turbine which respectively comprise such a center housing and to provide a method of manufacturing the center housing which improves the reliability and enhances the efficiency of the turbocharger at decreased manufacturing costs.

The object is achieved by a center housing having the features of claim 1. Furthermore, the object is achieved by a turbine having the features of claim 12 and a turbocharger having the features of claim 13. Also, the object is achieved by a method of manufacturing a center housing of a turbine having the features of claim 14. Further advantageous developments are defined by the dependent claims.

According to a first aspect of the present invention, a center housing of a turbine for a turbocharger comprising a floating insert defining a nozzle for passing a fluid, wherein a portion of said center housing forms a guiding means adapted to guide said floating insert axially slidably along said guiding means.

According to the structure of the first aspect of the present invention, the floating insert is guided by an element of the center housing while the axis of the shaft of the turbine wheel is defined by the same center housing. Thereby, it is possible to provide a structure in which the axis of the shaft of the turbine wheel and the axis of the floating insert coincide with a high accuracy. This structure, in turn, enables a minimization of the gap between the inside of a piston of the floating insert and the outer circumference of the turbine wheel for improving

the efficiency of the turbocharger. Furthermore, a deviation of the alignment of the axes of the guiding means and of the shaft in operation or assembly is prevented or even impossible.

5 Preferably, said guiding means comprises a plurality of rod elements slidably holding a part of said floating insert along surfaces of the rod elements. With the rod elements used in the structure, the extent of material required for the guiding means is minimized while securing the guidance of said floating  
10 insert.

Preferably, said guiding means comprises clearances between the rod elements for passing said fluid towards a turbine wheel. Between the rod elements, wide clearances are provided for  
15 passing the flow of the fluid, such as an exhaust gas. Therefore, the pressure loss can be minimized.

Preferably, a rotational or symmetric axis of said guiding means coincides with the rotational axis of a support hole for  
20 supporting a turbine wheel. The support hole serves as a bearing bore for bearing a shaft of said turbine wheel. Thereby, the decreased gap with an accurate position between the inner circumference of the floating insert and the outer circumference of the turbine wheel can be achieved.

25 Preferably, said guiding means is formed integrally with said center housing. Thereby, the accuracy of the alignment of the center axes of the floating insert and of the turbine wheel can be enhanced, since the guiding means and the center housing  
30 itself cannot be moved relatively to each other.

Preferably, an annular protrusion is formed at an outer circumference of said floating insert which is in sliding contact with an inner surface of said guiding means. The annular

protrusion defines the area of the floating insert which contacts the guiding means and, in particular, the rod elements thereof. Therefore, the friction and wear of the rod elements can be reduced.

5

According to further preferable form of the invention, said guiding means is formed as a recess in the center housing, wherein extensions formed at the floating insert are slidably engaged with said recess. Thus, by this structure it is possible to provide the sliding portion for slidably holding the floating portion at a portion of the center housing. In particular, the recess in the center housing corresponds to the shape of at least a portion of the extensions. In particular, at least the shapes of the sliding portions between the extensions and the recess are formed so as to correspond to each other.

Preferably, the inner circumferential surfaces of said extensions are in sliding contact with a surface of said recess facing radially outward. That is, the contact area is limited to the radial outward surface portion of the recess, thereby decreasing the area to be machined with a high precision. Also, a clearance between the extensions and the remaining surfaces of the recess is possible, which, in turn, enables the absorption of temperature induced dimensional changes in the structure. However, it is possible to arrange the sliding portions between the extensions and the recess in any other way as long as the guidance of the extensions in the recess with a high accuracy is achieved.

Preferably, the center housing further comprises a centering ring a surface of which being exposed to the flow of said fluid forms a fixed wall for the fluid to be fed to the turbine wheel. Thereby, the defined flow of the fluid towards the turbine wheel is achieved while enabling the design of the recess with a high

degree of freedom. That is, by providing the centering ring it is possible to form the recess continuously, since the floating insert is held in its rotational position. Furthermore, the centering ring prevents foreign matter from entering into the recess.

Preferably, a centering ring is provided for preventing said floating insert from rotating about the rotational axis. Thereby, further means for keeping the rotational position of the floating insert are not required.

Preferably, said extensions comprise a stepped portion, wherein the axial movement of said floating insert is restricted by an abutment of said stepped portion on said centering ring.

Thereby, the minimum opening degree of the throat is limited and can be set by forming the stepped portion at a predetermined position.

According to a second aspect of the present invention, a turbine comprises a center housing according to the above-mentioned first aspect. The turbine equipped with the center housing according to the first aspect of the present invention provides an enhanced efficiency and an improved reliability due to the higher accuracy and a decreased dimension of the gap between the outer circumference of the turbine wheel and the inner circumference of the floating insert.

According to a third aspect of the present invention, a turbocharger comprises a compressor for compressing a fluid and a turbine according to the above-mentioned second aspect. Such a turbocharger is provided with the advantages and the effects of the turbine as stated above.

According to a fourth aspect of the present invention, a method

of manufacturing a center housing of a turbine according to the above-mentioned aspects is provided. The center housing is in particular adapted to be used for a turbine for a turbocharger comprising a floating insert, said floating insert defining a  
5 nozzle for passing a fluid and being axially slidable along guiding means formed by a portion of said center housing. The method of manufacturing a center housing according to the fourth aspect of the present inventions comprises the following steps: preparing a semi-finished center housing comprising a bearing  
10 bore machining portion and a guiding means machining portion, holding said semi-finished center housing at a machining position on a machine tool, machining said bearing bore machining portion and said guiding means machining portion in a common step so as to obtain a  
15 bearing bore and a guiding means.

By machining the bearing bore and the guiding means in a common step, the accuracy of the alignment of the axes of the bearing bore and the guiding means is enhanced. Furthermore, the  
20 machining process is simplified, since only a single step is necessary. In particular, providing the bearing bore machining portion and the guiding means machining portion in the semi-finished center housing enables the process comprising such a single common step of machining.

25 Preferably, in the step of machining said bearing bore machining portion and said guiding means machining portion in a common step the position of a rotational axis of a tool of said tool machine is fixedly held. That is, the tool remains in a constant  
30 position with respect to the axis of the tool or the tool holder of the tool machine used. That has the effect that the accuracy with respect to the alignment of the bearing bore and of the guiding means is increased, since any deviations concerning the position of the tool can be avoided by fixing the position.

Preferably, in the step of machining said bearing bore machining portion and said guiding means machining portion in a common step the same tool of said tool machine is used. Thereby, the accuracy is further improved, since the tool is operated and actuated for both the bearing bore and the guiding means in one process. In case where the same tool is used for machining the bearing bore machining portion and the guiding means machining portion, the tool is prepared such that the machining process can be performed in a single step. That is, the tool comprises a portion for machining the bearing bore machining portion and a further portion for machining the guiding means machining portion.

Preferably, the step of preparing said semi-finished center housing comprises the step of casting. A cast semi-finished product can be finished in a simple manner and meets the requirements of operational loads which are applied to the turbocharger in operation.

Preferably, the step of preparing said semi-finished center housing comprises the step of integrally joining of at least two components so as to form an integral semi-finished center housing. That is, the semi-finished center housing can be manufactured from e.g. two parts which are joined before the machining. Preferably, said integrally joining includes welding. Thereby, complex shapes of the semi-finished center housing are possible, since the housing can be combined by at least two parts which can be manufactured in a simple way.

In the following, preferred embodiments and further technical solutions are described in detail with reference to the accompanying drawings.



Fig. 1 is a longitudinal cross section of a turbine for a turbocharger according to the present invention.

5 Fig. 2 is a longitudinal cross section of a turbine including a center housing according to a first embodiment of the present invention.

10 Fig. 3 is a sectional view of the turbine according to the first embodiment of the present invention along a line I-I in Fig. 2.

Fig. 4 is a longitudinal cross section of the turbine including a center housing according to a second embodiment of the present invention with the throat being in an opened position.

15 Fig. 5 is a longitudinal cross section of the turbine including the center housing according to the second embodiment of the present invention with the throat being in a closed position.

20 Fig. 6 is a sectional view of the turbine including the center housing according to the second embodiment of the present invention along a line II-II in Fig. 4.

25 Fig. 7 is a longitudinal cross section of the center housing of the turbine shown in Fig. 2 showing the cast product before the machining for explaining the method of manufacturing according to the third embodiment of the present invention.

30 Fig. 8 is a longitudinal cross section of the center housing of the turbine shown in Fig. 2 showing the machined product achieved by the method of manufacturing according to the third embodiment of the present invention.

In the following, the structure of the turbine of the turbocharger and, in particular, of the center housing thereof according to preferred embodiments of the present invention is explained with reference to Fig. 1 to Fig. 8.

A portion of a turbocharger, in particular, a turbine portion thereof, is shown in Fig. 1. In general, a turbocharger comprises a compressor (not shown) and an exhaust gas driven turbine 40. An impeller (not shown) of the compressor of the turbocharger is mounted on a shaft 42 which is driven by a wheel 44 of the gas turbine which, in turn, is driven by exhaust gas led towards the turbine wheel 44.

The turbine comprises a nozzle which is formed by an annular passage encompassing the turbine wheel 44. According to the present invention, the annular passage is formed by an inner wall 41 formed at a center housing 46 and an outer wall which is formed by a sliding piston 16 as a front portion of a floating insert 3, a portion of which is arranged around the turbine wheel 44.

The floating insert 3 according Fig. 1 comprises a plurality of support elements 11 (e.g. three support elements 11) which are provided so as to support the sliding piston 16 of the floating insert 3 on a sliding shaft 7. The support elements 11 formed in the shape of rods and are spaced in the radial direction so that the exhaust gas is passed through the clearances formed between the support elements 11. The exhaust gas is guided downstream of the turbine wheel 44 to a circumferential volute chamber formed by a discharge housing 27. The discharge housing 27 comprises an outlet (not shown) for discharging the exhaust gas from said

discharge housing 27.

The turbine wheel 44 is disposed on the left side of the discharge housing 27 according to Fig. 1 into which exhaust gas  
5 is discharged after the exhaust gas has been expanded while traveling through the turbine wheel 44.

The free end of the sliding shaft 7 is slidably supported by a bushing 9. This support enables a smooth and accurate movement  
10 of the sliding shaft 7 in the axial direction of the sliding shaft 7. The bushing 9 for supporting the sliding shaft 7 is fit into a hole which is formed in a boss 19 of the discharge housing 27. Between the sliding shaft 7 and the bushing 9 a sealing ring disposed in a recess at the sliding shaft can be  
15 provided.

A guiding device is formed at the center housing 46 and protrudes into the space accommodating the turbine wheel 44 towards the discharge housing 27. The guiding device is formed  
20 by a plurality of rods (rod elements) 30 which are equiangular spaced from each other and which comprise surfaces 31. The outer circumference of the sliding piston 16 is in sliding contact with the surfaces 31 of the rods 30 facing towards the turbine wheel or towards a center of a circle formed by the rods 30.

25

In the following, the operation of the structure shown in Fig. 1 is explained.

For adjusting the annular passage for passing the exhaust gas  
30 towards the wheel of the turbine, the axial distance between the inner wall 41 of the center housing 46 and the outer wall formed at the end of the sliding piston 16 facing towards the inner

wall 41 of the center housing 46 is changed. Thereby, the annular opening area of the nozzle can be adjusted so as to achieve optimum settings of the turbocharger system in correspondence with the operational condition thereof.

5

Furthermore, the exhaust gas which is discharged from the turbine 40 flows towards the discharge housing 27 as indicated by an arrow A in Fig. 1. The exhaust gas is directed towards the outer circumference of the interior of the discharge housing 27.

10 Finally, the exhaust gas, which is directed as described above, is discharged from the discharge housing 27 to an exhaust system (not shown).

A first embodiment according to the present invention is explained with reference to Fig. 2 and Fig. 3.

15

Fig. 2 shows a portion of a turbocharger, in particular, a portion of a turbine of said turbocharger. The turbine comprises a turbine wheel 144 which is supported by a shaft (not shown in Fig. 2) in a bearing bore 143. A compressor impeller (not shown) is supported by the same shaft and driven by the turbine wheel 144. The shaft supporting the turbine wheel 144 is held by a center housing 146. Such a support includes a sliding support bearing or any other bearing which ensures a high speed rotation while maintaining the axial position of the shaft with a high accuracy.

20

25

A turbine housing 101 is attached to the center housing 146 by a clamp 137. However, any other means for attaching the turbine housing and the center housing can be employed as long as an appropriate connection is established. In a recess between the mating surfaces of the center housing 146 and of the turbine housing 101, a sealing member 139 is inserted so as to seal the

30

gap between the housings 101 and 146, which, however, can be eliminated as long as the sealed state between the housings 101 and 146 can be reached. The turbine housing 101 surrounds the turbine wheel 144 and is provided to direct exhaust gas through the nozzle towards the turbine wheel 144 so as to drive the same.

As shown in Fig. 2, a variable annular nozzle is defined by an inner wall 141 and an outer wall 102 of the floating insert 103. The inner wall 141 is a part of the center housing 144 and, therefore, fixed. The outer wall 102 is formed by an axial end of floating insert 103, in particular by the axial end surface of the sliding piston 116, which forms a part of the floating insert 103.

The floating insert 103 comprising the piston 116 is movable in the axial direction of the turbine wheel 144. The distance between the inner wall 141 and the outer wall 102 changes by axially moving the floating insert 103. That is, the width of the annular gap of surrounding the turbine wheel 144 for directing the exhaust gas towards the turbine wheel 144 is changed. As shown in Fig. 2 by an arrow B, the flow of the exhaust gas is directed from the turbine housing 101 through the annular passage, passed through the turbine wheel 144 and further led to the exhaust system.

As shown in Fig. 2, the piston 116 of the floating insert 103 comprises an annular protrusion 135 which is formed on the outer circumference of the piston 116. The outermost surface of the protrusion is formed as smooth surface. A guiding device comprising circularly arranged rod elements 130 is provided on the center housing 146, which rod elements 130 extend into the

turbine housing 101. In the present embodiment, three rod elements 130 are provided which are arranged in a circle and each comprise inner surfaces 131 which face towards the turbine wheel 144. The outer circumferential surface of the protrusion 135 is in sliding contact with the inner surfaces 131 of the rod elements 130.

A shown in more detail according to Fig. 3, the piston 116 and, in particular, the protrusion 135 thereof is in sliding contact with the inner surface 131 of the rod elements 130 of the guiding device. The inner diameter of the guiding device (guiding means) formed by the rod elements 130 substantially corresponds to the outer diameter of the protrusion 135 of the piston 116 of the floating insert 103. Thereby, the piston 116 of the floating insert 103 is guided by the inner surfaces 131 of the rod elements 130. Since the guiding device is formed by the angularly spaced rods 130, as can be seen in Fig. 3, the flow of the exhaust gas towards the turbine wheel 144 is enabled through the clearances between the rods 130.

The cross-section of the rod elements 130 is wing shaped so as to further improve the flow characteristics of the nozzle for directing the exhaust gas towards the turbine wheel 144.

The guiding device according to the present embodiment is formed as a part of the center housing 146. In particular, the rods 130 are formed integrally with the center housing 146. Therefore, the central axis of the turbine wheel 144 and the central axis of the piston 116 of the floating insert 103 coincides with a high accuracy. For this reason, the distance between the inner surface of the piston 116 and the blades of the turbine wheel 144 can be set smaller, thereby increasing the efficiency of the

turbine system. In particular, the loss of pressure due to exhaust gas leaking through the gap between the turbine wheel 144 and the piston 103 can be decreased.

5 Furthermore, the rods 130 of the guiding device each comprise a step portion 133. The protrusion 135 of the piston 116 abuts to the step portion 133 at a predetermined axial position of the piston 116. Thereby, the piston 116 is prevented from outrunning a predetermined range.

10 In the following, a second embodiment according to the present invention is explained with reference to Figs. 4-6. The structure of the embodiment shown in Figs. 2 and 3 is similar to the structure shown in Figs. 4-6. In the following, merely the differences between the structures shown in Figs. 2 and 3 and  
15 Figs. 4-6 are explained.

The turbine according to Fig. 4 comprises a turbine wheel 244, a turbine housing 201 which is attached to a center housing 246 by  
20 a clamp 237 and a floating insert 203. However, any other means for attaching the turbine housing and the center housing can be employed as long as an appropriate connection is established. The floating insert 203 comprises a piston 216 which surrounds the turbine wheel 244. At the side of the piston 216 facing to  
25 the center housing 246, extensions 235 are provided, which are disposed in equal angular distances throughout the circumference of the piston, as can be seen in Fig. 6. The extensions 235 are formed with a wing shaped cross sections so as to further improve the flow characteristics in the nozzle.

30 In Fig. 4 the piston 216 is shown in an opened condition. Clearances are provided between the extensions 235 for providing

a flow path from the turbine housing 201 towards the turbine wheel 244. Through the clearances, a flow is enabled towards the turbine wheel 244, which is indicated by an arrow C in Fig. 4 and Fig. 5. In the opened condition, the extensions 235 slightly protrude into a recess 230 and are in sliding contact with the inner circumference thereof. In particular, the extensions 235 are in sliding contact with surfaces 231. The surfaces 231 are formed in the same shape as those portions of the extensions 235 which are in sliding contact with the surfaces 231.

Fig. 5 shows the turbine with the piston 216 in a closed condition. In this condition, the extensions 235 are inserted into the recess 230 to such an extent that the step portion provided at the end of the inner surface of the extensions 235 is in abutment with a centering ring 233.

The centering ring 233 is shown in more detail in Fig. 8. The centering ring 233 comprises holes which correspond to the positions and shapes of the extensions 235 of the piston 216.

The piston 216 is prevented from rotating in the assembled state by the centering ring 233, since the centering ring 233 itself is held between the center housing 246 and the turbine housing 201. Furthermore, the assembly is simplified with the provision of the centering ring 233.

The centering ring 233 comprises a surface which faces towards the piston 216. This surface of the centering ring 233 which is exposed to the flow of the fluid forms a fixed wall for the fluid to be correctly fed to the turbine wheel.

In the following, according to a third embodiment of the present invention, a method of manufacturing a center housing of a



turbine for a turbocharger according to the present invention is explained based on the center housing shown in Fig. 7 and Fig. 8. The center housing according to Figs. 7 and 8 is applicable to the turbine for the turbocharger according to the above  
5 embodiment shown in Fig. 2 and Fig. 3.

Fig. 7 shows a semi-finished center housing 146a as a cast product before the machining. In particular, the semi-finished center housing 146a according to Fig. 7 does not comprise a  
10 bearing bore for the shaft of the turbine wheel and no finished sliding surface at the guiding device. The semi-finished center housing comprises a bearing bore machining portion 143a and a guiding means machining portion 130a which are provided with a certain oversize so as to enable a material removing machining  
15 process.

As described in detail according to the first embodiment, the axial alignment of the imaginary circles formed by the rods of the guiding means and the bearing bore of the center housing  
20 enables the decrease of the gap between the turbine wheel and the piston of the floating insert.

According to the method of manufacturing the center housing according to the present invention, the bearing bore machining portion 143a and the guiding means machining portion 130a are  
25 machined commonly in a single step.

That is, the bearing bore machining portion 143a and the guiding means machining portion 130a are machined while the semi-  
30 finished center housing 146a is remains clamped on the tool machine, such as a grinding machine or the like. The result is the center housing 146 shown in Fig. 8 which includes the

finished bearing bore 143 and the finished surfaces 131 of the rods 130 of the guiding device.

Thereby, the machining process is improved, since the center housing 146 is provided with a bearing bore 143 and a guiding device 131 the alignment of which can be enhanced to a high extent. Thus, the efficiency of the turbocharger is improved due to the decrease of the gap between the turbine wheel and the sliding piston.

However, the semi-finished center housing 146a can be unclamped from the tool machine in the process of machining the bearing bore machining portion 143a and the guiding means machining portion 130a as long as the position for machining these portions is such that an accurate alignment of the axes is achieved.

Furthermore, the method of manufacturing a center housing of a turbocharger as explained above is also applicable to the center housing of a turbine according the second embodiment shown in Figs. 4-6.

For applying the method according to the present invention to the center housing according to the second embodiment, the center housing shown in Figs. 6-8 is manufactured by machining the bearing bore 243 for the shaft of the turbine wheel 244 and the inner circumferential surface of the recess 230.

Corresponding to the method according to the present invention, the machining process comprises a common step of machining the bearing bore and the recess at the same machining process without unclamping the center housing 246. Thereby, the alignment of the bearing bore 243 and the inner circumferential

surface 231 of the recess 230 is improved.

The recess 230 is formed by a portion of the center housing 246. The axis of the support hole serving as the bearing bore 243 for supporting the shaft of the turbine wheel 244 and the axis of the virtual circle formed by the surfaces 231 of the recess 230 coincide with a high accuracy. Therefore, the gap between the inner diameter of the piston 216 and the outer diameter of the turbine wheel 244 can be minimized. Therefore, the same effects as above stated can be achieved.

The invention is not limited to the above described embodiments thereof. In particular, the single structures according to the above explained embodiments can be freely combined with each other.

**Claims:**

1. A center housing (46; 146; 246) of a turbine for a  
5 turbocharger comprising a floating insert (3; 103; 203) defining  
a nozzle for passing a fluid, a portion of said center housing  
(46; 146; 246) forming a guiding means (31; 131; 231) adapted to  
guide said floating insert (3; 103; 203) axially slidably along  
said guiding means (31; 131; 231).

10 2. A center housing (46; 146) of a turbine according to claim 1,  
wherein said guiding means (31; 131) comprises a plurality of  
rod elements (30; 130) slidably holding a part of said floating  
insert (3; 103).

15 3. A center housing (46; 146) of a turbine according to one of  
claims 1-2, wherein said guiding means (31; 131) comprises  
clearances between the rod elements (30; 130) for passing said  
fluid towards a turbine wheel (44; 144).

20 4. A center housing (46; 146) of a turbine according to one of  
claims 1-3, wherein a rotational axis of said guiding means (31;  
131) coincides with the rotational axis of a bearing bore (43;  
143) for supporting a turbine wheel (44; 144).

25 5. A center housing (46; 146) of a turbine according to one of  
claims 1-4, wherein said guiding means (31; 131) is formed  
integrally with said center housing (46; 146).

30 6. A center housing (46; 146) of a turbine according to one of  
claim 1-5, wherein an annular protrusion (35; 135) is formed at  
an outer circumference of said floating insert (3; 103) which is  
in sliding contact with an inner surface of said guiding means  
(31; 131).

7. A center housing (246) of a turbine according to claim 1, wherein said guiding means (231) is formed in a recess (230) in the center housing (246), wherein extensions (235) formed at the floating insert (203) are slidably engaged with said recess.

8. A center housing (246) of a turbine according to claim 7, wherein inner circumferential surfaces of said extensions (235) are in sliding contact with a surface (231) of said recess (230) facing radially outward.

9. A center housing (246) of a turbine according to one of claims 7 or 8, further comprising a centering ring (233) a surface of which being exposed to the flow of said fluid forms a fixed wall for the fluid to be fed to the turbine wheel (244).

10. A center housing (246) of a turbine according to claim 9, wherein the centering ring (233) prevents said floating insert (203) from rotating about the rotational axis.

11. A center housing (246) of a turbine according to one of claims 7-10, wherein said extensions (235) comprise a stepped portion, wherein the axial movement of said floating insert (203) is restricted by an abutment of said stepped portion on said centering ring (233).

12. A turbine (40) comprising a center housing (46; 146; 246) according to one of claims 1-11.

13. A turbocharger comprising a compressor for compressing a fluid and a turbine (40) according to claim 12.

14. A method of manufacturing a center housing (146) of a turbine according to one of claims 1-11, comprising the steps of

preparing a semi-finished center housing (146a) comprising a bearing bore machining portion (143a) and a guiding means machining portion (130a),

5 holding said semi-finished center housing (146a) at a machining position on a machine tool,

machining said bearing bore machining portion (143a) and said guiding means machining portion (130a) in a common step so as to obtain a bearing bore (143) and a guiding means (130).


10 15. A method according to claim 14, wherein in the step of machining of said bearing bore machining portion (143a) and of said guiding means machining portion (130a) in a common step the position of a rotational axis of a tool of said tool machine is fixedly held.

15 16. A method according to one of claims 14-15, wherein in the machining said bearing bore machining portion (143a) and said guiding means machining portion (130a) in a common step the same tool of said tool machine is used.

20 17. A method according to one of claims 14-16, wherein the step of preparing said semi-finished center housing comprises the step of casting.

25 18. A method according to one of claims 14-17, wherein the step of preparing said semi-finished center housing comprises the step of integrally joining of at least two components so as to form an integral semi-finished center housing.

30 19. A method according to claim 18, wherein said integrally joining includes welding.

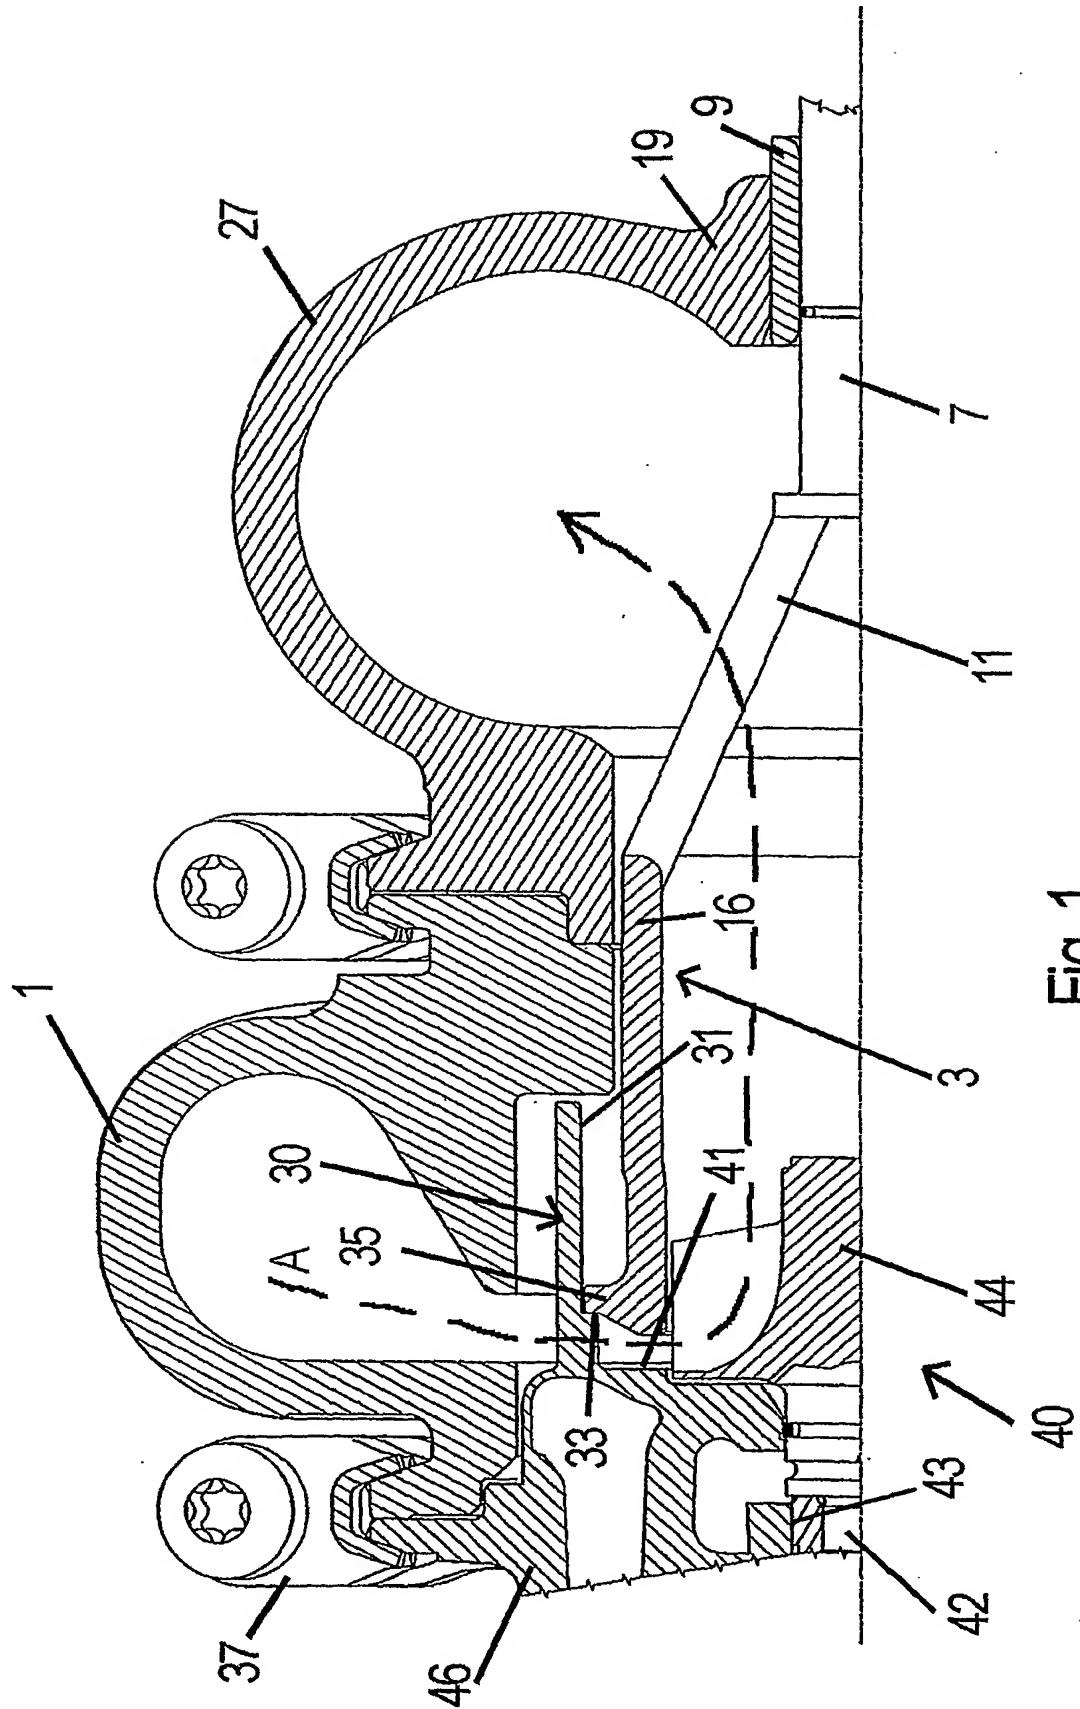

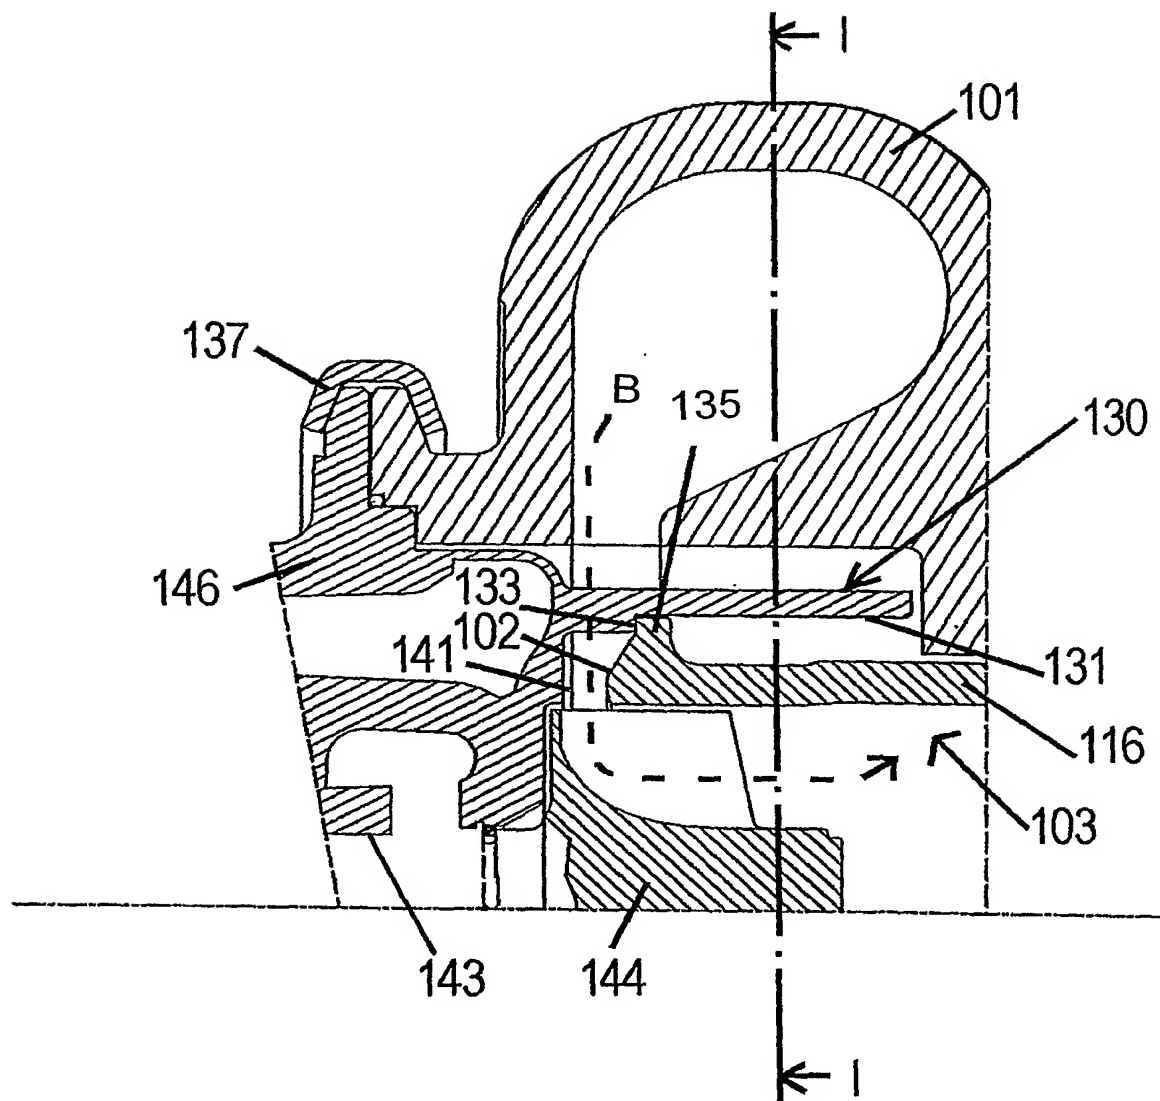


Fig. 2



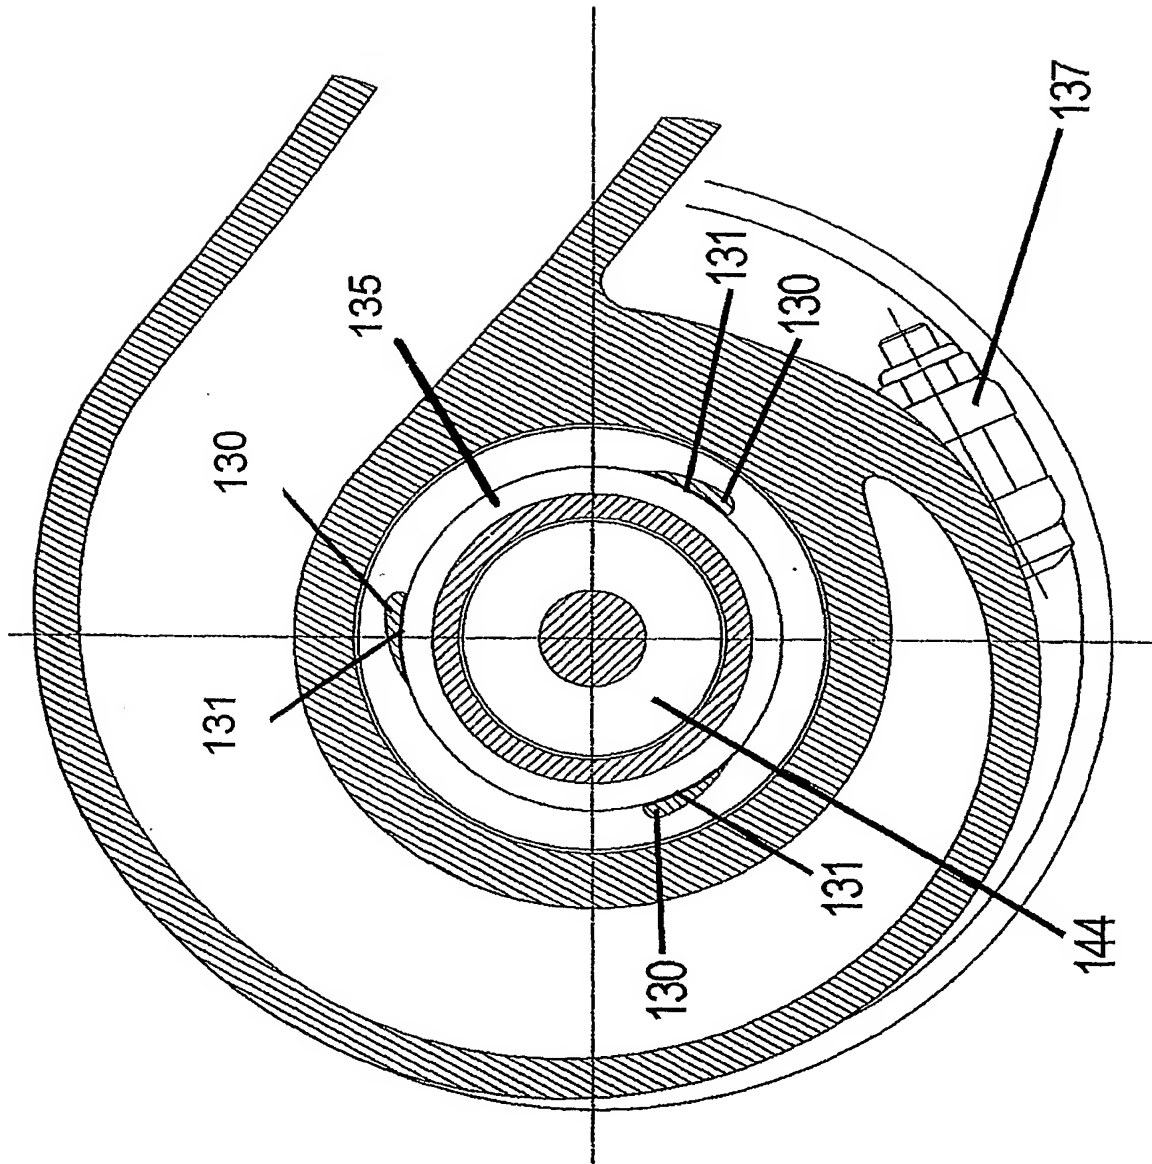


Fig. 3

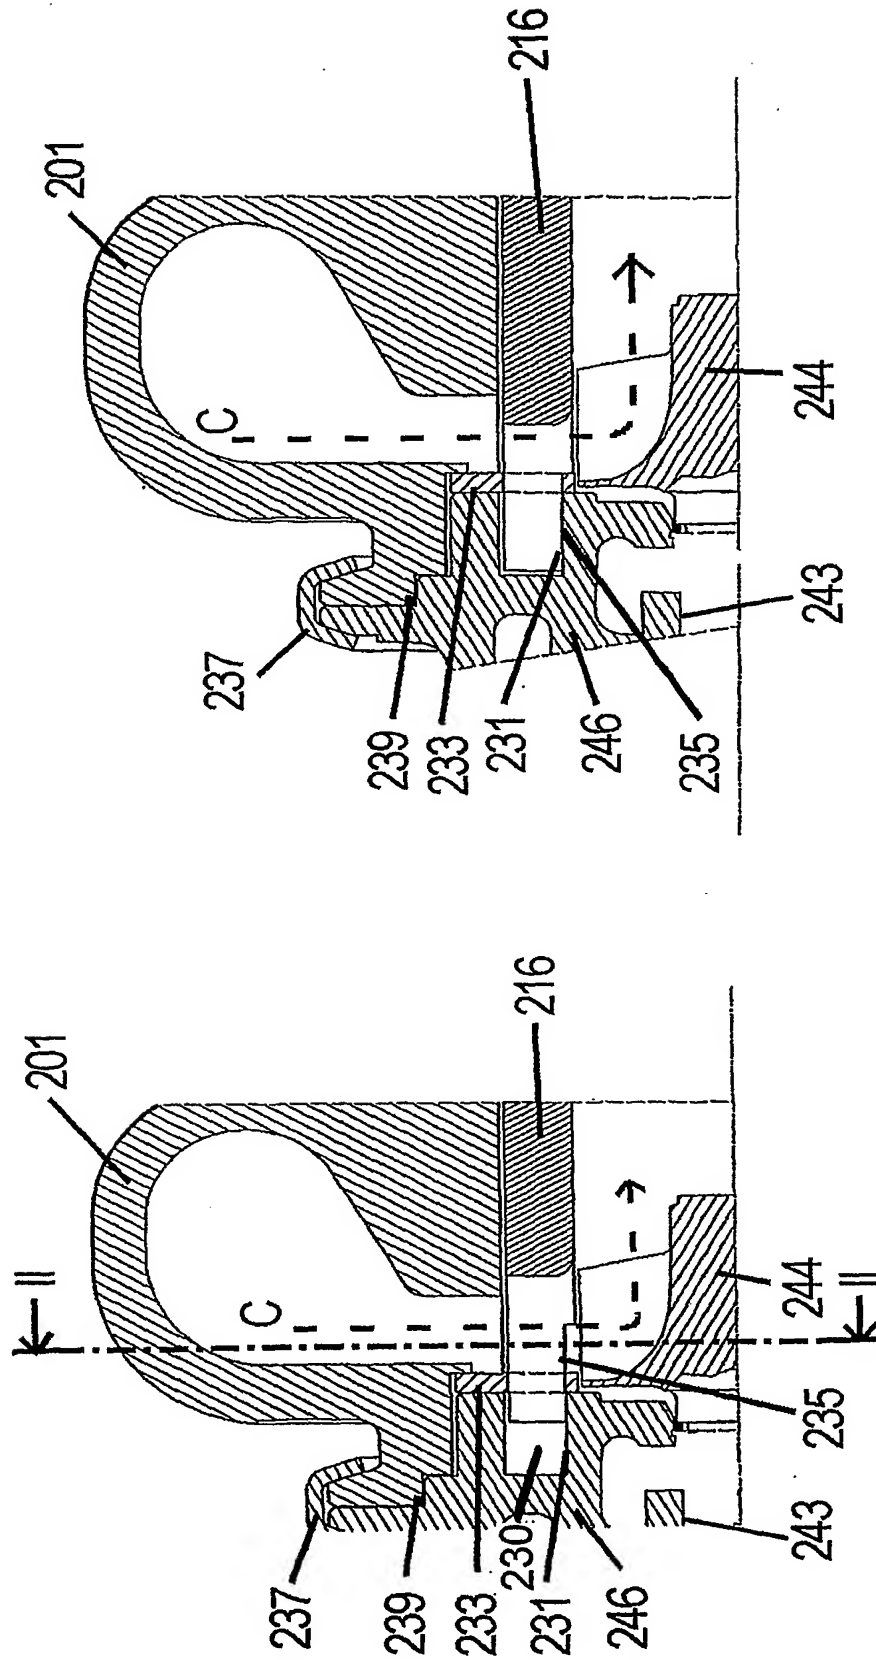


Fig. 5

Fig. 4

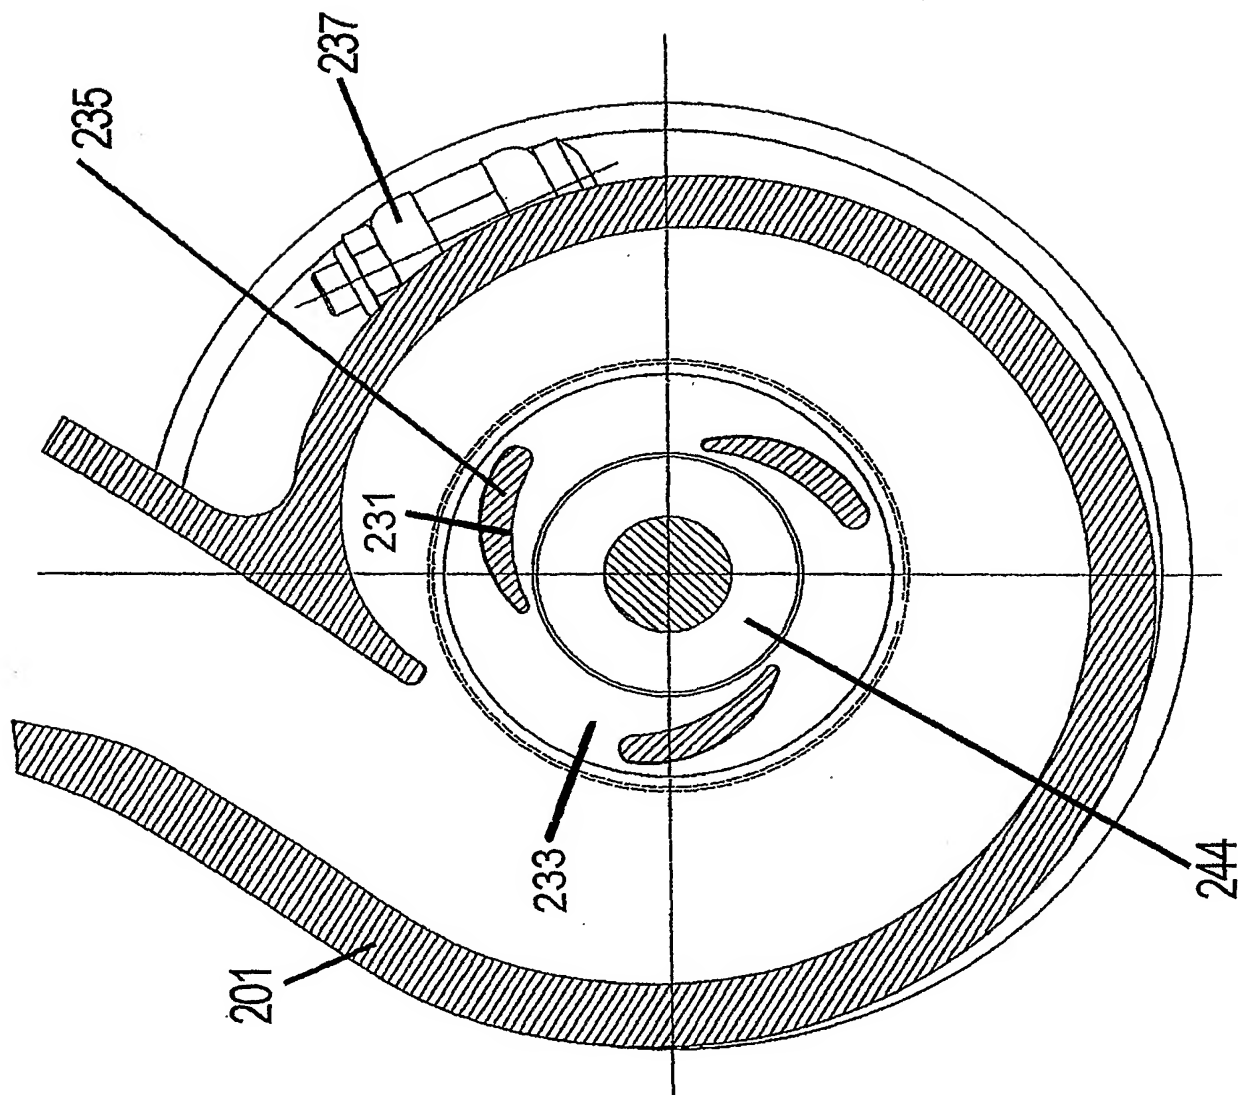


Fig. 6

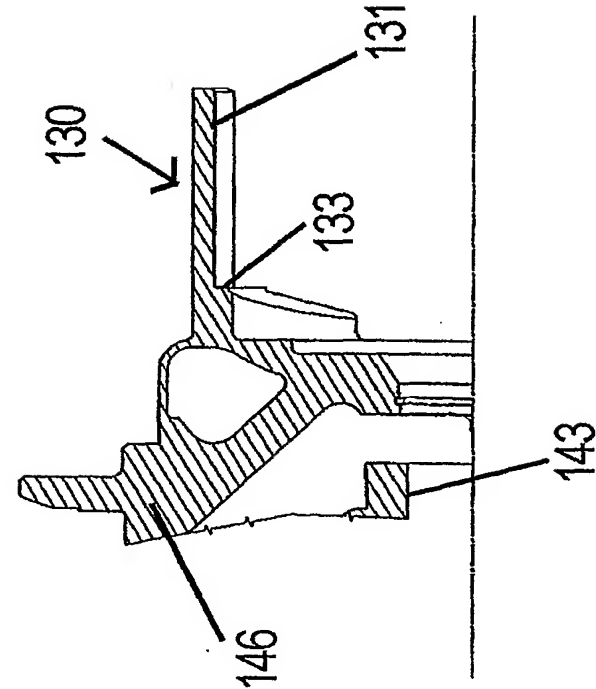


Fig. 8

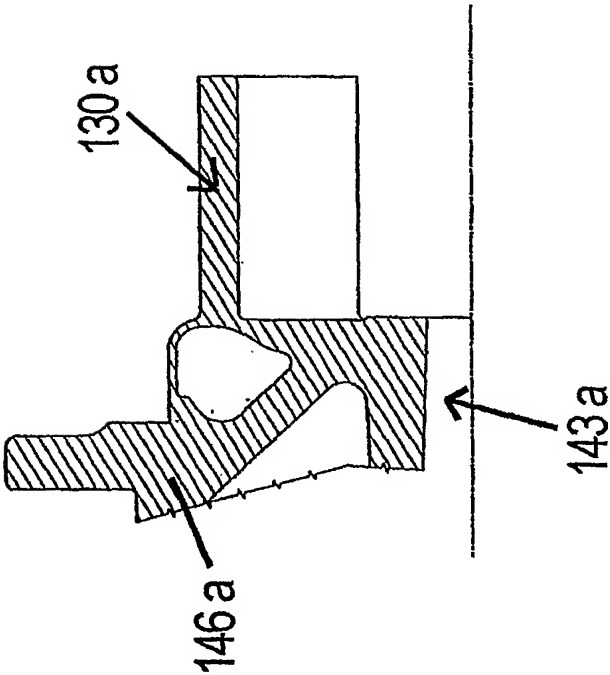


Fig. 7

## INTERNATIONAL SEARCH REPORT

International Application No

PCT /EP2004/004675

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F01D17/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F01D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2004/022924 A (DEACON ED ; LOMBARD ALAIN (FR); PERRIN JEAN-LUC (FR); VIOLA ERIC (FR);) 18 March 2004 (2004-03-18) figures 3,4	1,4,7-13
X	WO 03/023194 A (LEAVESLEY MALCOLM GEORGE) 20 March 2003 (2003-03-20) page 4 figures 4,14,16,19,20	1-6,12, 13
X	CH 668 455 A (BBC BROWN BOVERI & CIE) 30 December 1988 (1988-12-30) figures 7,8	1-6,12, 13
X	US 2 861 774 A (BUCHI ALFRED J) 25 November 1958 (1958-11-25) figures 1,5,6,13	1-6,12, 13
	-/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*&amp;\* document member of the same patent family

Date of the actual completion of the international search

14 January 2005

Date of mailing of the international search report

21/01/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Angelucci, S

## INTERNATIONAL SEARCH REPORT

International Application No

PCT /EP2004/004675

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 02/06636 A (ALLIEDSIGNAL TURBO SA ; LOMBARD ALAIN RENE (FR); PERRIN JEAN LUC HUBER) 24 January 2002 (2002-01-24) figures 1,5a -----	1,4,7-13

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT /EP2004/004675

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 2004022924	A	18-03-2004	WO 2004022924 A1	18-03-2004
WO 03023194	A	20-03-2003	DE 10297203 T5	12-08-2004
			WO 03023194 A1	20-03-2003
			GB 2394014 A	14-04-2004
			US 2004244372 A1	09-12-2004
CH 668455	A	30-12-1988	CH 668455 A5	30-12-1988
US 2861774	A	25-11-1958	NONE	
WO 0206636	A	24-01-2002	WO 0206636 A1	24-01-2002
			AU 6706000 A	30-01-2002
			EP 1301689 A1	16-04-2003
			JP 2004504524 T	12-02-2004

**PUB-NO:** WO2005106212A1  
**DOCUMENT-IDENTIFIER:** WO 2005106212 A1  
**TITLE:** TITLE DATA NOT AVAILABLE  
**PUBN-DATE:** November 10, 2005

**ASSIGNEE-INFORMATION:**

**NAME COUNTRY**